


DOVA FUTURES LIMITED

Designing Futures. Building Realities.

HOTEL SWIMMING POOL

DESIGN & CONSTRUCTION DRAWINGS

Reinforced Blockwork Pool · Sloped-Base Section · In-Situ Concrete Walls

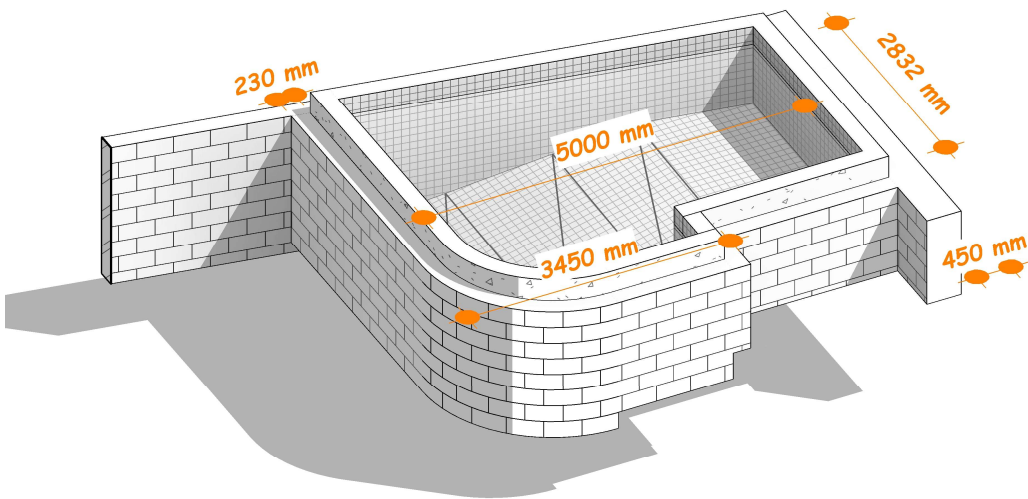

Hotel Swimming Pool — 3D Axonometric View

Prepared by:	Dova Futures Limited
Prepared for:	FHS Hotel
Project:	Hotel Swimming Pool — Design Drawings Package
Reference:	DFL/2026/HOTEL-POOL
Date:	June 2026
Status:	For Client Review & Approval

CONFIDENTIAL — Prepared for Client Use Only · Lagos, Nigeria

1.0 PROJECT OVERVIEW

Dova Futures Limited has prepared this design drawings package for a hotel swimming pool to be constructed in reinforced blockwork and in-situ concrete. The pool features a rectangular plan with one curved (radiused) wall, a sloped base transitioning from a deep to a shallow zone, and an integrated step pocket for entry access. The external wall faces are constructed in 9-inch hollow blocks filled with weak concrete, with a reinforced in-situ concrete superstructure above.

This document presents the key construction drawings, annotated dimensions and structural specification for client review and approval prior to commencement of works.

1.1 Key Project Statistics

Pool Internal Length 5,000 mm <i>Clear internal, face to face</i>	Pool Internal Width 3,450 mm <i>Clear internal</i>
Max pool Wall Height 1,900 mm <i>From top of coping</i>	Water Depth (Deep) 1,500 ~ 1,700 mm <i>Clear water at deep end</i>
Water Depth (Shallow) 800 ~ 1000 mm <i>Variable — sloped base</i>	Approx. Pool Volume ≈ 28,000 – 30,000 L <i>Incl. sloped floor estimate</i>
Base Slab 200 mm RC <i>+ 100 mm weak concrete blinding</i>	Pool Wall Thickness 230 mm <i>Concrete wall of M15 grade</i>

2.0 CONSTRUCTION SECTIONS

The longitudinal section is presented below. Section A (detail) shows the construction specification including wall build-up, base slab, blinding and hollow block fill.

Dimension Parameter	Value	Notes
Overall pool span (internal)	5,010 mm	Long-axis, face to face
Concrete Wall at deep end	1,800 mm	From top of coping to base
Concrete wall at Shallow end	1,100 mm	From top of coping to base
Deep zone floor length	3,556 mm	Horizontal plan dimension
Shallow zone floor length	1,444 mm	Horizontal plan dimension

2.1 Section A — DWG A-02 | Detail Section (Construction)

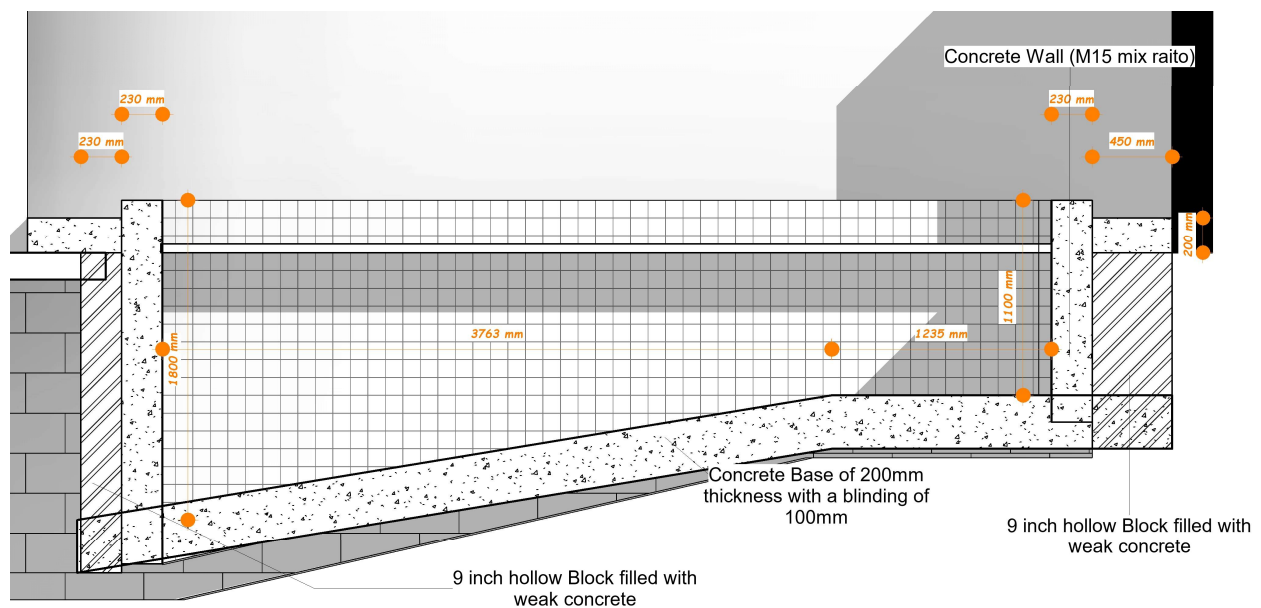


Fig. 2 — Longitudinal Section A — Detail (DWG A-02) · All dimensions in millimetres

3.0 3D MASSING VIEWS

The following axonometric views present the pool massing from multiple angles, showing the external blockwork construction, curved wall, and pool interior with sloped floor.

3.1 Front-Right View — DWG 3D-01

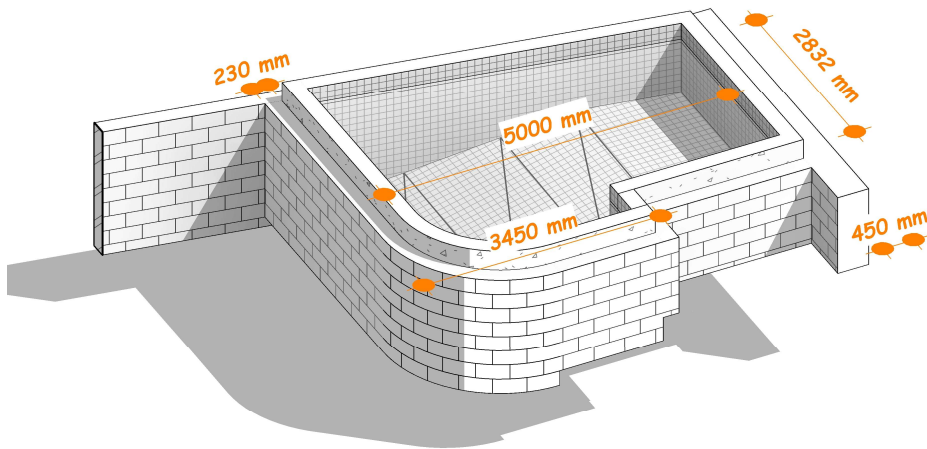


Fig. 3 — 3D Axonometric: Front-Right View (DWG 3D-01) · Showing external blockwork.

3.2 Rear-Left View — DWG 3D-02 & Interior View — DWG 3D-03

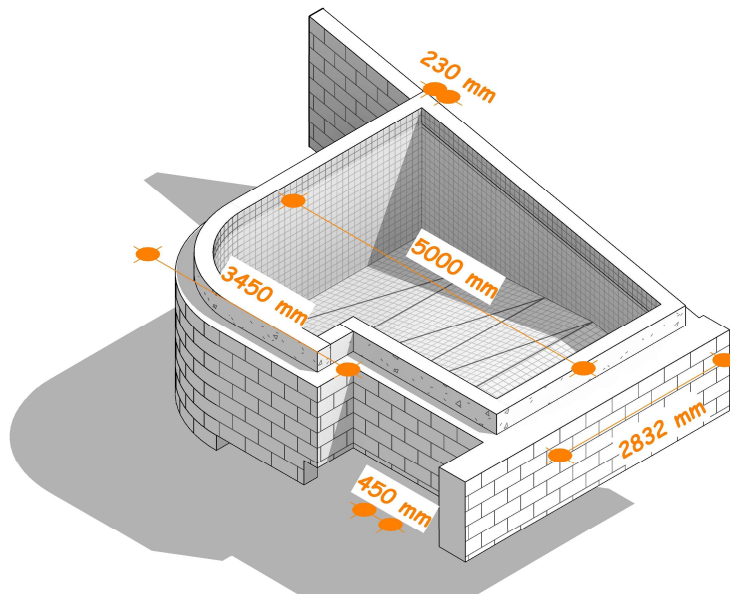


Fig. 4 — Rear-Left View (DWG 3D-02) · Curved wall & coping detail


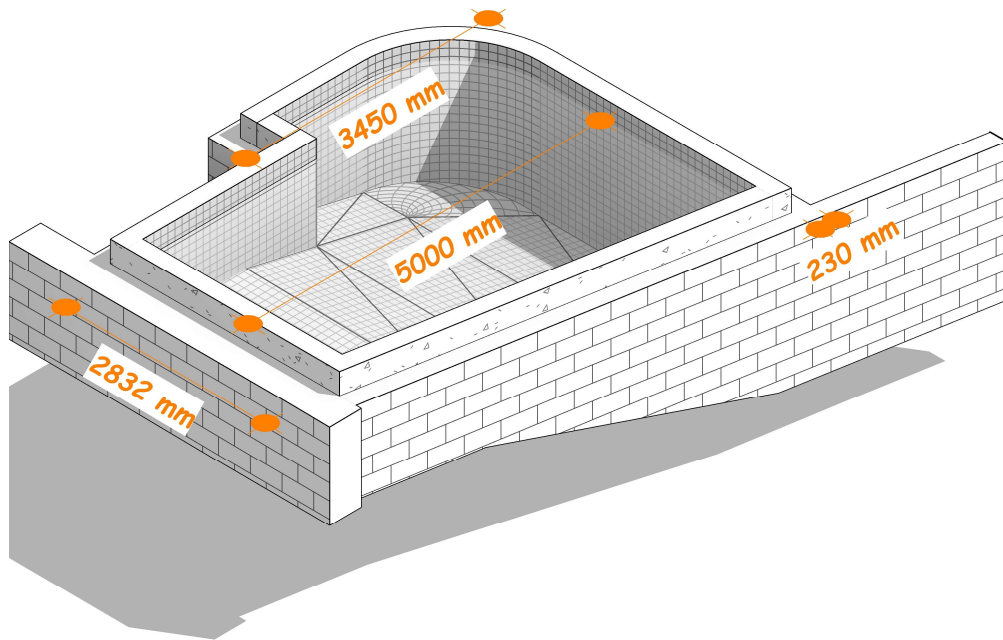


Fig. 5 — Interior View (DWG 3D-03) · Sloped floor, step pit & wall section

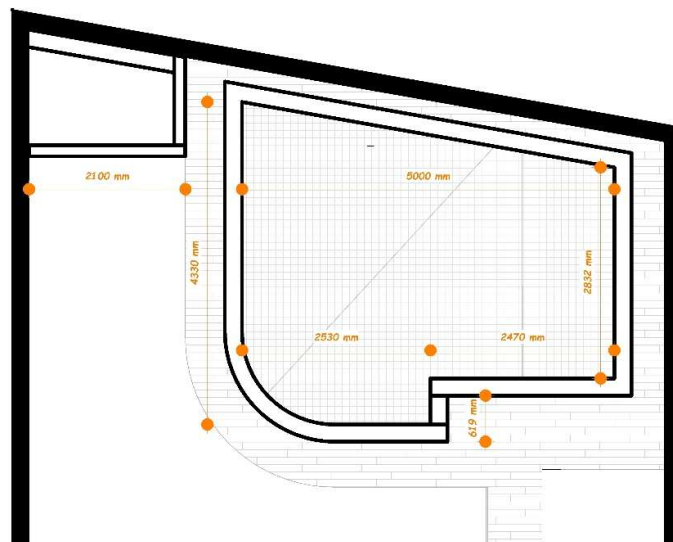

For technical queries relating to this document, please contact Dova Futures Limited directly.