


DOVA FUTURES LIMITED

Designing Futures. Building Realities.

SWIMMING POOL CONSTRUCTION PROJECT REPORT & QUOTATION

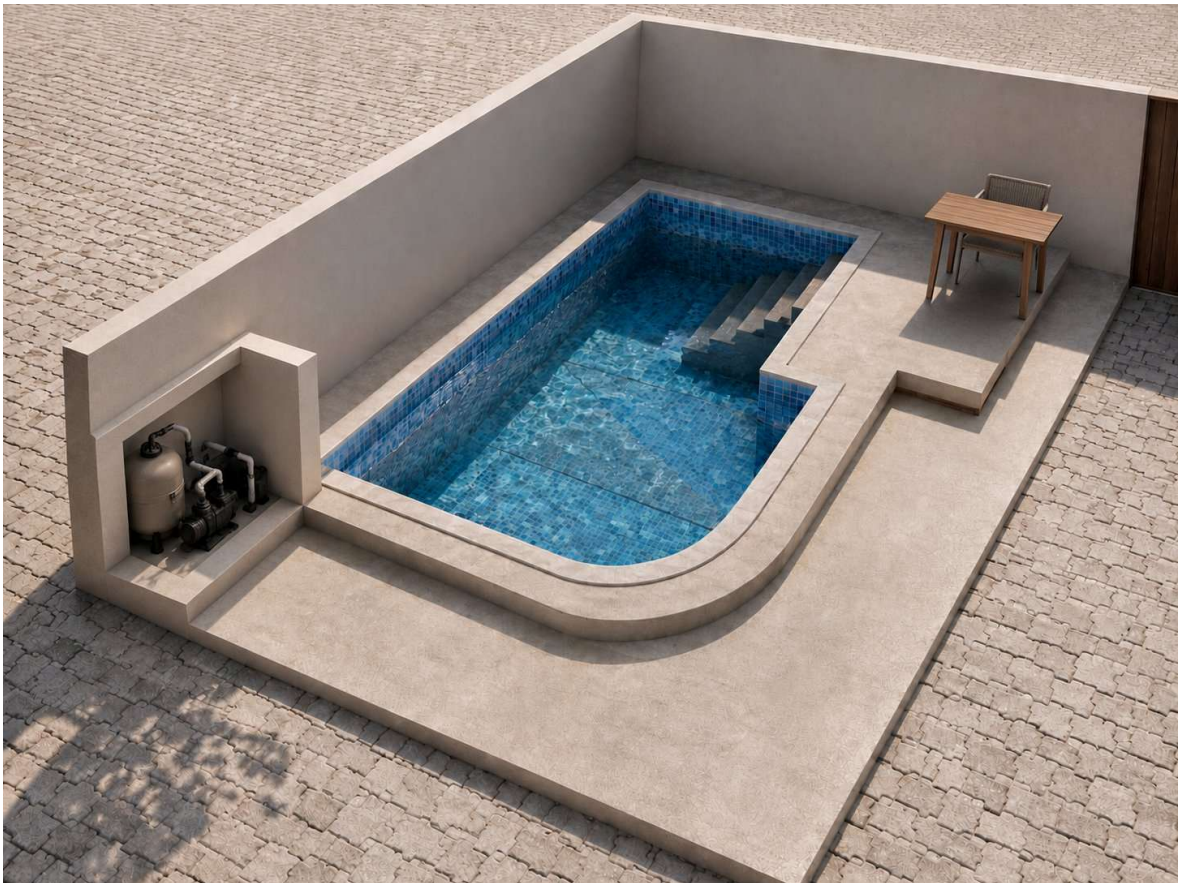

Proposed pool — 3D visualization

Prepared by: Dova Futures Limited, Lagos, Nigeria

Prepared for: [Client Name]

Date: 12 June 2026

Ref: DFL/QT/2026/POOL-001

1.0 Project Overview

This report presents the design description, scope of works, preliminary Bill of Quantities (BOQ) and quotation for the construction of a reinforced concrete swimming pool with an integrated deck, corner entry steps and a dedicated plant/equipment niche. The pool features a contemporary geometric plan with a softened curved corner, finished in glass mosaic tiles, and is serviced by a sand-filter circulation system with underwater lighting.

1.1 Design Description

- Free-form rectangular pool with one radiused (curved) corner for a softer visual edge.
- Corner entry steps (4 treads) for safe, gradual access into the pool.
- Raised concrete pool surround/coping band wrapping the water body, with an adjoining paved deck and seating area.
- Recessed plant niche housing the sand filter and circulation pump, screened within the boundary wall zone.
- Finish: glass mosaic pool tiles (client supply) over waterproofed render.

1.2 Key Dimensions (per drawing)

Parameter	Value
Pool length (internal)	5,000 mm (5.0 m)
Pool width (internal)	3,600 mm (3.60 m)
Water depth (assumed, constant)	1,500 mm (1.50 m) — to be confirmed
Water depth at deepest end	1,800 mm (1.80 m)
Water depth at shallow end	1,200 mm (1.2 m)
Deck offset (sides)	2,100 mm
Deck strip (rear)	1,000 mm
Overall site frontage	8,540 mm
Entry steps	4 No. treads, corner location
Approx. water volume	≈ 25,000 – 26,000 litres (≈25.5 m ³)

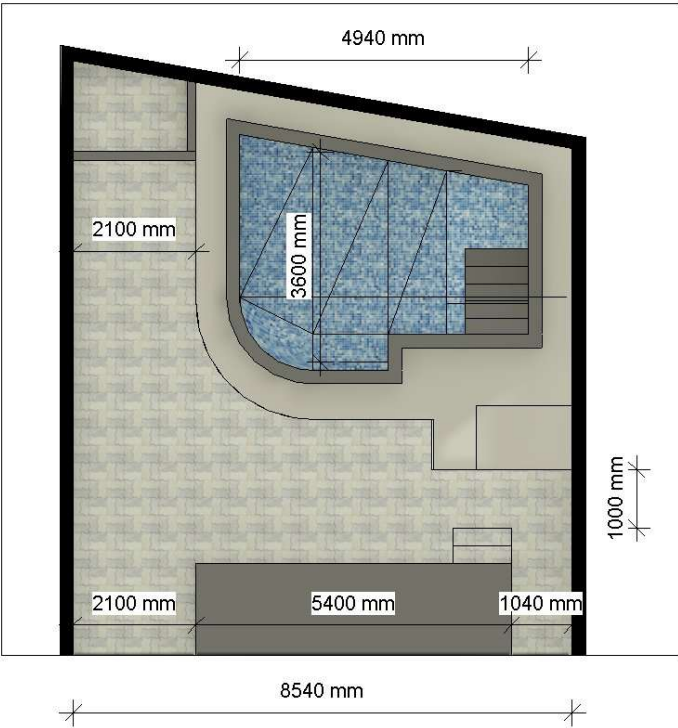


Fig. 1 — Dimensioned plan layout

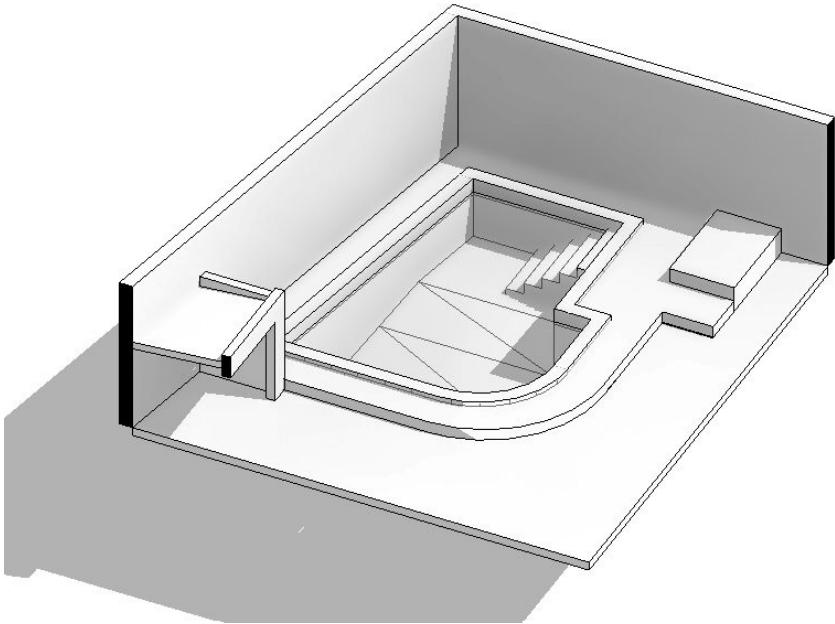


Fig. 2 — 3D massing model showing pool and deck

2.0 Scope of Works

- Civil works: setting out, excavation, blinding, reinforced concrete pool base and walls, 9" blockwork, rendering and waterproofing.
- Mechanical works: supply and installation of sand filter, circulation pump, suction/return pipework, skimmer and main drain fittings.
- Electrical works: underwater pool lights, wiring, conduits and control panel installation.
- Tiling works: laying of client-supplied mosaic tiles to pool floor, walls and steps (labour only).

Civil materials and tiles are supplied by the Client (Section 3.0). All labour; mechanical and electrical packages are executed by Dova Futures Limited.

3.0 Section A — Civil Works Materials (Client Supply)

Description	Quantity
9" Blocks	350 – 500 Nos
Cement	130 – 160 Bags
Marine Boards	20 Nos
2" × 3" Timber	60 Lengths
Additional Bracing Timber (50%)	30 Lengths
Total 2" × 3" Timber	90 Lengths
Nails	3 Bags
Waterproofing Powder	1 Bag
Waterproofing Liquid	1 Keg
10mm Reinforcement Bars	50 Lengths
12mm Reinforcement Bars	50 Lengths
Sharp Sand	As Required
Granite	As Required
Plaster Sand	As Required
Tiles	As Required

4.0 Section B — Civil Works Labour

Description	Amount (₦)
Formwork Labour	100,000
Reinforcement Works	120,000
Masonry Works — Excavation, Blinding, Casting of Base & Walls, Blockwork (Lump Sum)	650,000
Civil Works Labour Subtotal	870,000
<i>OPTIONAL: Felting of Pool Walls (waterproof membrane to prevent water penetration) — Lump Sum</i>	<i>275,000</i>

The optional wall felting provides an additional waterproof membrane barrier behind the structural walls, recommended where the water table is high or soil moisture is significant. It is priced separately for the Client's decision and is not included in the Contract Sum.

5.0 Section C — Mechanical Works

Description	Amount (₦)
Mechanical Materials (filter, pump, pipework & fittings)	1,940,000
Mechanical Installation Labour	400,000
Mechanical Works Subtotal	2,340,000

6.0 Section D — Electrical Works

Description	Amount (₦)
Underwater Pool Lights	350,000
Electrical Wiring & Conduits	200,000
Control Panel	300,000
Installation & Labour	275,000
Electrical Works Subtotal	1,125,000

7.0 Section E — Tiling Works (Labour Only)

Tiles are supplied by the Client. The tiled area is computed from the drawing dimensions, assuming a constant water depth of 1.50 m (to be confirmed on site).

7.1 Tiling Area Computation

Surface	Basis	Area (m ²)
Pool floor	5.0 m by 3.6 m	18.00
Pool walls	Perimeter $\approx$ 16.70 m $\times$ 1.50 m depth	25.00
Steps (treads & risers)	Lumpsum	2.00
Deck Area	Lumpsum	20.00
Net tiled area		65.00
Cutting / curvature & coping allowance		5.00
Provisional tiled area (for billing)		70.00

7.2 Tiling Labour Cost

Description	Amount (₦)
Pool Tiling Labour (floor, walls & steps) — Lump Sum	350,000
Tiling Works Subtotal	350,000

This quote covers installation of mosaic tiles inside the pool, matt grey tiles as coping around the pool edges, and matt tiles with wood finishes at the external walkway around the pool.

8.0 Cost Summary & Contract Sum

Description	Amount (₦)
B — Civil Works Labour	870,000
C — Mechanical Works	2,340,000
D — Electrical Works	1,125,000
E — Tiling Labour (Lump Sum)	350,000
SUBTOTAL	4,685,000

Description	Amount (₦)
Contingency Allowance (3%)	140,550
Contractor's Overheads & Profit (10%)	468,500
CONTRACT SUM	5,294,050

Amount in words: Five Million, Two Hundred and Ninety-Four Thousand and Fifty Naira Only.

Optional item: Felting of pool walls (Section B) — ₦275,000 lump sum. If instructed by the Client, this will be added to the Contract Sum.

All civil works materials (Section A) and pool tiles remain Client supply and are excluded from the Contract Sum.

9.0 Assumptions & Exclusions

- Water depth assumed as a constant 1.50 m; tiled areas and quantities will be adjusted once depths are confirmed.
- All dimensions are taken from the issued drawing and are subject to on-site verification before setting out.
- Client supplies all Section A civil materials and all pool tiles; the Contractor will issue call-off schedules ahead of each stage.
- Water supply for filling/testing, site security and unobstructed site access are provided by the Client.
- Deck paving/finishes beyond the pool coping band, landscaping and boundary wall finishes are excluded unless separately instructed.
- Dewatering beyond normal conditions, rock excavation and statutory permit fees (if any) are excluded.

10.0 Commercial Terms

- Payment schedule: 60% mobilization; 30% on completion of casting and waterproofing; 10% on completion, testing and handover.
 - Programme: approximately 6 – 8 weeks from mobilization, subject to weather and timely material supply.
 - Quotation validity: 30 days from the date of this document.
 - Workmanship warranty: 12 months on waterproofing works from the date of handover.
-